




Finished wall thickness: 4" / 5" / 6"

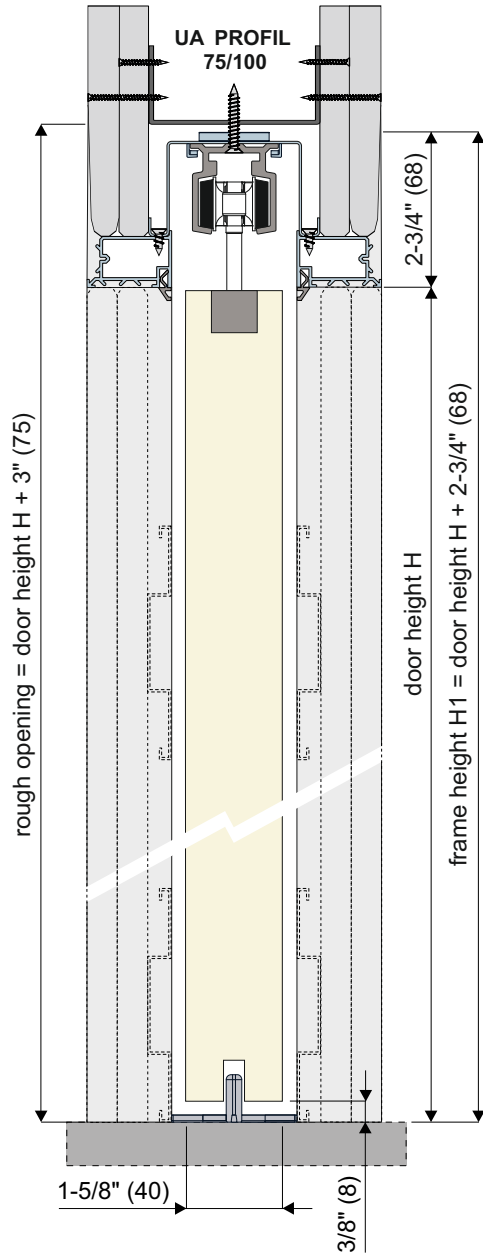

DOOR SIZING EXAMPLES: 6" WALL


DOOR SIZE A / H	POCKET WIDTH B	ROUGH OPENING width / height
24" (610) / 8' (2440)	25-8/8" (651)	52" (1321) / 8' 3" (2515)
26" (660) / 8' (2440)	30-5/8" (776)	58-7/8" (1496) / 8' 3" (2515)
28" (711) / 8' (2440)	30-5/8" (776)	60-7/8" (1547) / 8' 3" (2515)
30" (762) / 8' (2440)	35-1/2" (901)	67-7/8" (1723) / 8' 3" (2515)
32" (813) / 8' (2440)	35-1/2" (901)	69-7/8" (1774) / 8' 3" (2515)
34" (864) / 8' (2440)	35-1/2" (901)	71-7/8" (1825) / 8' 3" (2515)
36" (914) / 8' (2440)	40-1/2" (1026)	78-3/4" (2000) / 8' 3" (2515)
38" (965) / 8' (2440)	40-1/2" (1026)	80-3/4" (2051) / 8' 3" (2515)
40" (1016) / 8' (2440)	45-3/8" (1151)	87-3/4" (2227) / 8' 3" (2515)
42" (1067) / 8' (2440)	45-3/8" (1151)	89-3/4" (2278) / 8' 3" (2515)
44" (1118) / 8' (2440)	45-3/8" (1151)	91-3/4" (2329) / 8' 3" (2515)
46" (1168) / 8' (2440)	50-1/4" (1276)	98-5/8" (2504) / 8' 3" (2515)
48" (1219) / 8' (2440)	50-1/4" (1276)	100-5/8" (2555) / 8' 3" (2515)
50" (1270) / 8' (2440)	50-1/4" (1276)	102-5/8" (2606) / 8' 3" (2515)
52" (1321) / 8' (2440)	55-1/8" (1401)	109-1/2" (2782) / 8' 3" (2515)
54" (1372) / 8' (2440)	55-1/8" (1401)	111-1/2" (2833) / 8' 3" (2515)
56" (1422) / 8' (2440)	55-1/8" (1401)	113-1/2" (2883) / 8' 3" (2515)
58" (1473) / 8' (2440)	60-1/8" (1526)	120-1/2" (3059) / 8' 3" (2515)
59" (1500) / 8' (2440)	60-1/8" (1526)	121-1/2" (3085) / 8' 3" (2515)

NOTES:

- Min. / Max. dimensions**
Width = 24" - 59" (610-1500); Height = 6' 5-1/2" - 9' 2-1/4" (1970 - 2800)
Doors for passage widths greater than 46" (1168), without the possibility of complete insertion into the pocket
- Wall thickness**
4" finished wall = 75 mm profile + 2x 1/2" drywall
5" finished wall = 75 mm profile + 4x 1/2" drywall
6" finished wall = 100 mm profile + 4x 1/2" drywall
- Structural beam** - Pocket frame requires a rough opening with a load bearing header
- Door slab** - Door thickness 1-5/8" (40), bottom clearance 3/8" (8), door slab width +1" (+25)
- Adjustable track stop** - Equipped with a removable track with an adjustable track stop
- Trolleys** - Smooth operation. Engineered for 100.000 closing cycles. Door weight up to 265 lbs (120 kg) standard


ACCESSORIES:

- Soft Close mechanism** - Smooth and quiet motion; Two - sided option for 34"+ doors (860+)
- Push to open** - Gentle push on the door edge to release the door leaf from the pocket; Magnetic latch
- Wiring kit** - Electric wiring channel and junction box kit; Option only for 2x6 walls, min. distance from edge is 7" (170)

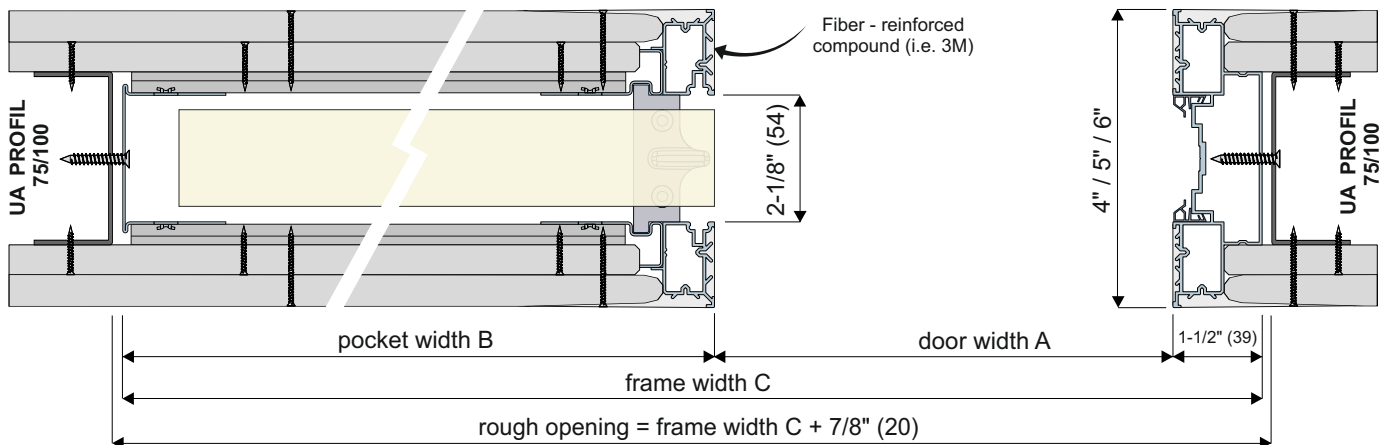



Finished wall thickness: 4" / 5" / 6"

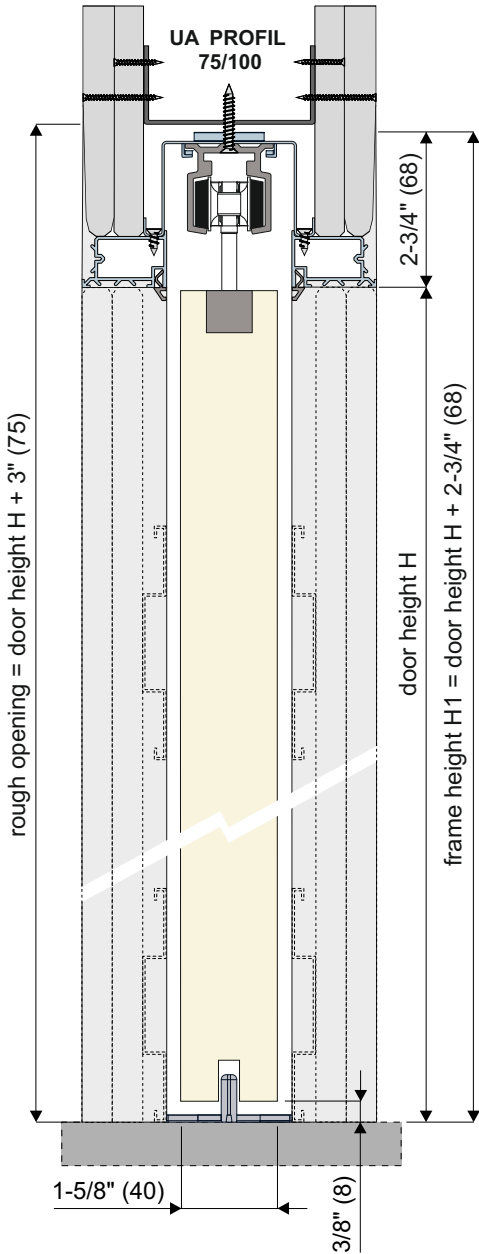

DOOR SIZING EXAMPLES: 6" WALL

DOOR SIZE A / H	POCKET WIDTH B	ROUGH OPENING width / height
48" (1220) / 8' (2440)	25-8/8" (651)	100-1/8" (2542) / 8' 3" (2515)
52" (1320) / 8' (2440)	30-5/8" (776)	113-7/8" (2892) / 8' 3" (2515)
56" (1422) / 8' (2440)	30-5/8" (776)	117-7/8" (2994) / 8' 3" (2515)
60" (1524) / 8' (2440)	35-1/2" (901)	131-3/4" (3346) / 8' 3" (2515)
64" (1626) / 8' (2440)	35-1/2" (901)	135-3/4" (3448) / 8' 3" (2515)
68" (1727) / 8' (2440)	35-1/2" (901)	139-3/4" (3550) / 8' 3" (2515)
72" (1829) / 8' (2440)	40-1/2" (1026)	153-1/2" (3900) / 8' 3" (2515)
76" (1930) / 8' (2440)	40-1/2" (1026)	157-1/2" (4002) / 8' 3" (2515)
80" (2032) / 8' (2440)	45-3/8" (1151)	171-1/2" (4354) / 8' 3" (2515)
84" (2134) / 8' (2440)	45-3/8" (1151)	175-1/2" (4456) / 8' 3" (2515)
88" (2235) / 8' (2440)	45-3/8" (1151)	179-1/2" (4558) / 8' 3" (2515)
92" (2337) / 8' (2440)	50-1/4" (1276)	193-1/4" (4908) / 8' 3" (2515)
96" (2438) / 8' (2440)	50-1/4" (1276)	197-1/4" (5010) / 8' 3" (2515)
100" (2540) / 8' (2440)	50-1/4" (1276)	201-1/4" (5112) / 8' 3" (2515)
104" (2642) / 8' (2440)	55-1/8" (1401)	215-1/8" (5464) / 8' 3" (2515)
108" (2743) / 8' (2440)	55-1/8" (1401)	219-1/8" (5566) / 8' 3" (2515)
112" (2845) / 8' (2440)	55-1/8" (1401)	223-1/8" (5666) / 8' 3" (2515)
116" (2946) / 8' (2440)	60-1/8" (1526)	237" (6018) / 8' 3" (2515)
118" (3000) / 8' (2440)	60-1/8" (1526)	239" (6072) / 8' 3" (2515)

NOTES:

- Min. / Max. dimensions**
Width = 48" - 118" (1220-3000); Height = 6' 5-1/2" - 9' 2-1/4" (1970 - 2800)
Doors for passage widths greater than 92" (2337), without the possibility of complete insertion into the pocket
- Wall thickness**
4" finished wall = 75 mm profile + 2x 1/2" drywall
5" finished wall = 75 mm profile + 4x 1/2" drywall
6" finished wall = 100 mm profile + 4x 1/2" drywall
- Structural beam** - Pocket frame requires a rough opening with a load bearing header
- Door slab** - Door thickness 1-5/8" (40), bottom clearance 3/8" (8), door slab width +1" (+25)
- Adjustable track stop** - Equipped with a removable track with an adjustable track stop
- Trolleys** - Smooth operation. Engineered for 100.000 closing cycles. Door weight up to 265 lbs (120 kg) standard

ACCESSORIES:

- Soft Close mechanism** - Smooth and quiet motion; Two - sided option for 34"+ doors (860+)
- Push to open** - Gentle push on the door edge to release the door leaf from the pocket; Magnetic latch
- Wiring kit** - Electric wiring channel and junction box kit; Option only for 2x6 walls, min. distance from edge is 7" (170)

